

Tundra



PRODUCT TYPE: Glazed Porcelain

COLOURS: Pearl, Creme, Grey and Putty


SIZES: 75x75mm, 200x1200mm, 300x300mm,
300x600mm 600x600mm and 600x1200mm

FINISHES/USAGE: Matt and Grip/Wall and Floor

AESTHETIC QUALITIES: Concrete look

TECHNICAL INFO: P3 Pendulum slip rating (Matt)
P4 Pendulum slip rating (Grip)
More technical information on last page

VARIATION:



V2

Inspired by the natural tundra stone, TUNDRA features four beautiful colours with gentle organic veining. It is available in a variety of versatile sizes and is suitable for both commercial and residential use.


Tundra

PRODUCT SPECIFICATIONS

| SIZES | FINISHES | SLIP RATING | TILE EDGE |
|-------------|----------|-------------|-----------|
| 75x75mm | MATT | P3 Pendulum | RECTIFIED |
| 200x1200mm* | MATT | P3 Pendulum | RECTIFIED |
| 300x300mm | MATT | P3 Pendulum | RECTIFIED |
| 300x600mm | MATT | P3 Pendulum | RECTIFIED |
| 600x600mm | MATT | P3 Pendulum | RECTIFIED |
| 600x1200mm* | MATT | P3 Pendulum | RECTIFIED |
| 300x600mm | GRIP | P4 Pendulum | RECTIFIED |

*Size available in Pearl and Grey only

FORMATS

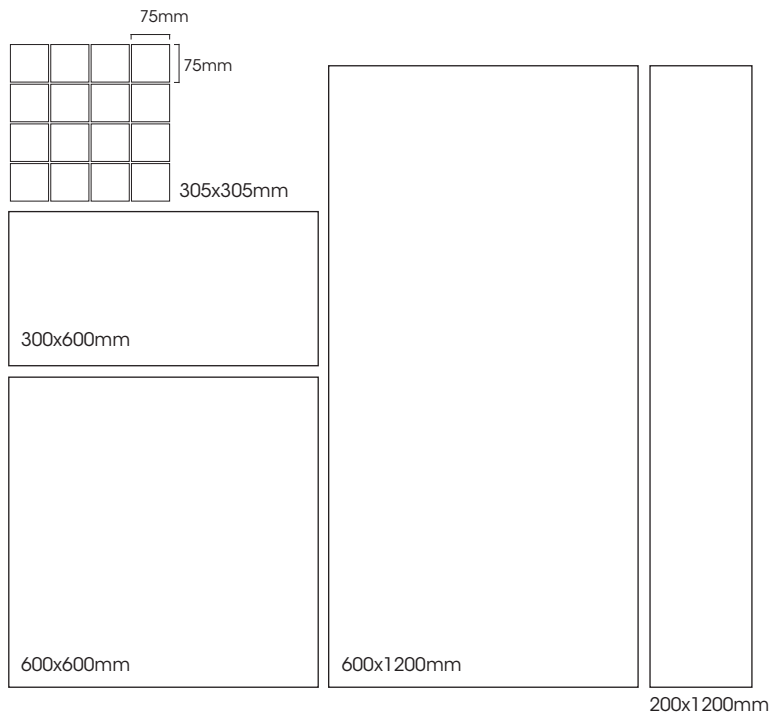

PEARL*



CREME



GREY*



PUTTY

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

Tundra

PEARL VARIATION




Tundra

CREME VARIATION



Tundra

GREY VARIATION

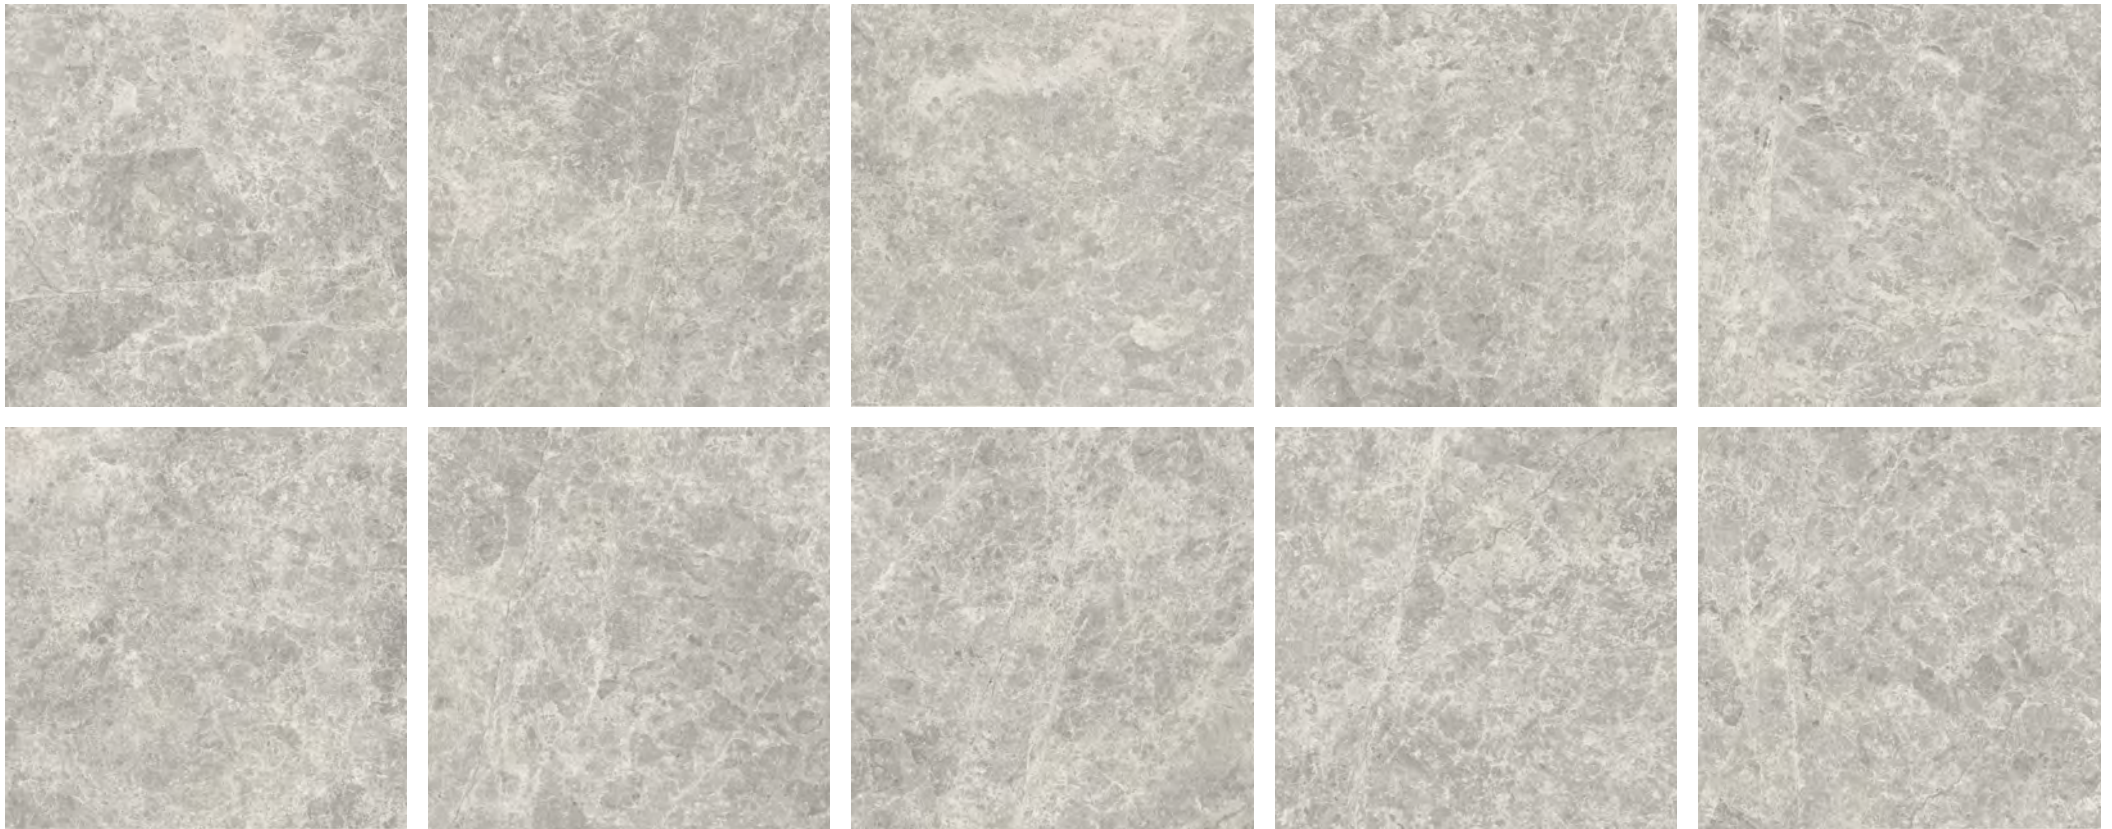

Tundra







PUTTY VARIATION



Tundra



TECHNICAL DATA

| | technical characteristics Group B I a | test method | required values | va ue |
|---|--|--------------|--|-----------|
|  | water absorption | iso 10545-3 | ≤ 0,5% | 0.21% |
|  | bending strength | iso 10545-4 | ≥ 12MPA | ≥ 33.5MPA |
|  | breaking strength (S) | iso 10545-4 | ≥ 350 N | ≥ 1785N |
|  | abrasion resistace | iso 10545-7 | Max. 175 mm ³ PEI 1-5 | Class 3 |
|  | chemical resistance | iso 10545-13 | Household chemicals and swimming pool salts | GA |
| | | | Low concentration of acids and alkalis | GLA |
|  | stain resistance | iso 10545-14 | Minimum Class 3 | Class 5 |