



COTTO 2.0 Series is a modern twist on traditional Mediterranean cotto flooring. Featuring a soft textured surface and warm tones, COTTO 2.0 is available in a matt finish and contemporary sizes, allowing it to be a versatile wall and floor tile.

**PRODUCT TYPE**: Glazed Porcelain

COLOURS: Neutra, Aldea and Cuero

**SIZES:** 75x300mm, 150x300mm and 600x600mm

Rectified edges

FINISHES/USAGE: Matt

Floor and wall

**AESTHETIC QUALITIES:** Warm Mediterranean colours

**TECHINICAL INFO:** P4 Pendulum Slip Rating (Matt)

More technical info on the last page

VARIATION:






#### PRODUCT SPECIFICATIONS

| SIZES     | FINISHES | SLIP RATING | TILE EDGE |
|-----------|----------|-------------|-----------|
| 75x300mm  | MATT     | P4 Pendulum | RECTIFIED |
| 150x300mm | MATT     | P4 Pendulum | RECTIFIED |
| 600x600mm | MATT     | P4 Pendulum | RECTIFIED |

#### **FORMATS**









ALDEA MATT





**CUERO MATT** 



#### **BRICK FLATLAY EXAMPLES**





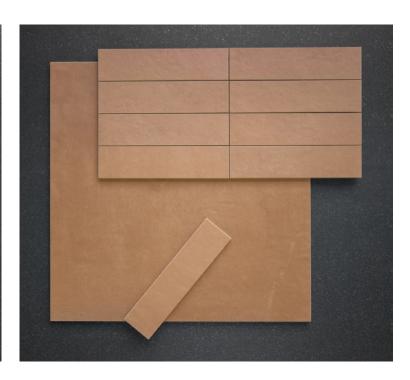








Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.



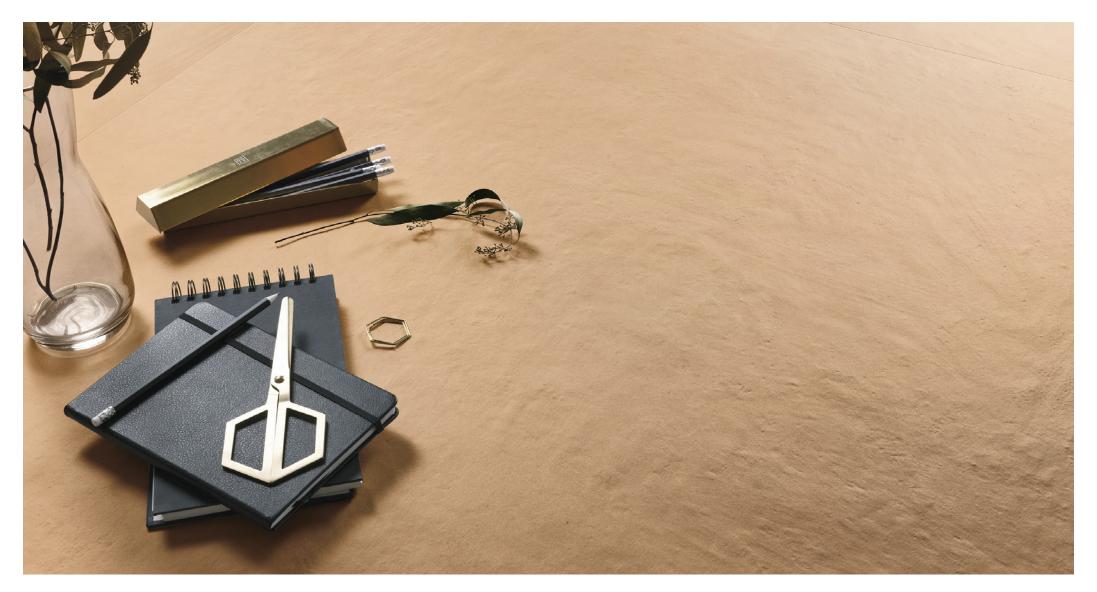







#### TECHNICAL DATA

|              | technical characteristics | test method  | required values                     | result    |
|--------------|---------------------------|--------------|-------------------------------------|-----------|
| ۵ ۵ ۵<br>۵ ۵ | water absorption          | ISO 10545-3  | ≤0.5%                               | ≤0.2%     |
| 50           | modulus of rupture        | ISO 10545-4  | ≥ 35 N/mm2                          | compliant |
| *            | surface quality           | ISO 10545-2  | Complies with the standards         | ≥95%      |
| 5            | thermal shock resistance  | ISO 10545-9  | No sample must show visible defects | compliant |
| Q)           | deep abrasion resistance  | ISO 10545-6  | ≤ 175 mm3                           | compliant |
|              | chemical resistance       | ISO 10545-13 | Declared value                      | compliant |
|              | resistance to frost       | ISO 10545-12 | Resistant                           | compliant |
|              | staining resistance       | ISO 10545-14 | Minimum Class 3                     | compliant |