

Travstone Cross



PRODUCT TYPE: Glazed Porcelain

COLOURS: Pearl, Cream and Argent


SIZES: 150x150mm, 600x600mm, 600x600x20mm,
600x1200mm
and 1200x2700x6mm

FINISHES/USAGE: Matt and Grip/Wall and Floor

AESTHETIC QUALITIES: Crosscut look

TECHNICAL INFO: P4 Pendulum slip rating (Matt)
P5 Pendulum slip rating (Grip)
P5 Pendulum slip rating (Grip Paver)

VARIATION:



V2

Inspired by the natural crosscut stone, TRAVSTONE CROSS features three beautiful colours with gentle organic veining. It is available in versatile sizes and is suitable for both commercial and residential use.


Travestone Cross

PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
150x150mm	MATT	P4 Pendulum	RECTIFIED
600x600mm	MATT	P4 Pendulum	RECTIFIED
600x1200mm	MATT	P4 Pendulum	RECTIFIED
1200x2700x6mm	MATT SLAB	-	RECTIFIED
600x600mm	GRIP	P5 Pendulum	RECTIFIED
600x600x20mm	GRIP PAVER	P5 Pendulum	RECTIFIED

*1200x2700x6mm is only available in Pearl

FORMATS

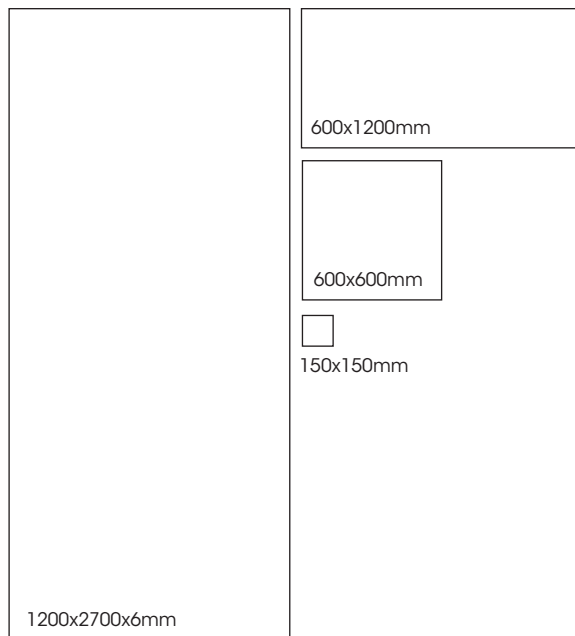

PEARL



CREAM



ARGENT

Travestone Cross

PEARL VARIATION



Travestone Cross

CREAM VARIATION



Travestone Cross

ARGENT VARIATION



Travestone Cross











Travestone Cross



Travestone Cross

TECHNICAL DATA

	technical characteristics	test method	required values	result
	water absorption	ISO 10545-3	≤0.5%	≤0.4%
	modulus of rupture	ISO 10545-4	≥ 35 N/mm ²	compliant
	surface quality	ISO 10545-2	Complies with the standards	≥95%
	thermal shock resistance	ISO 10545-9	No sample must show visible defects	compliant
	deep abrasion resistance	ISO 10545-6	≤ 175 mm ³	compliant
	chemical resistance	ISO 10545-13	Declared value	compliant
	resistance to frost	ISO 10545-12	Resistant	compliant
	staining resistance	ISO 10545-14	Minimum Class 3	compliant