

Travstone Vein



PRODUCT TYPE: Glazed Porcelain

COLOURS: Pearl, Cream and Argent


SIZES: 220x245mm Bell, 300x600mm and
600x1200mm

FINISHES/USAGE: Matt and Grip/Wall and Floor

AESTHETIC QUALITIES: Travertine look

TECHNICAL INFO: P4 Pendulum slip rating (Matt)
P5 Pendulum slip rating (Grip)

VARIATION:



V2


Inspired by the natural travertine stone, TRAVSTONE features three beautiful colours with gentle organic veining. It is available in three versatile sizes and is suitable for both commercial and residential use.

Travestone Vein

PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATING	TILE EDGE
220x245mm Bell	MATT	P4 Pendulum	RECTIFIED
300x600mm	MATT	P4 Pendulum	RECTIFIED
600x1200mm	MATT	P4 Pendulum	RECTIFIED
600x1200mm	GRIP	P5 Pendulum	RECTIFIED

FORMATS

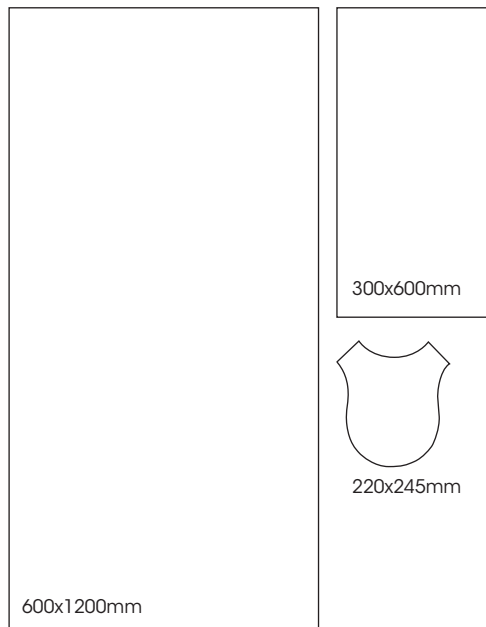

PEARL



CREAM



ARGENT



PEARL MATT BELL



CREAM MATT BELL



ARGENT MATT BELL

Travestone Vein

PEARL VARIATION



Travestone Vein

CREAM VARIATION



Travestone Vein

ARGENT VARIATION



Travestone Vein











Travestone Vein



Travstone Vein

TECHNICAL DATA

	technical characteristics	test method	required values	result
	water absorption	ISO 10545-3	≤0.5%	≤0.4%
	modulus of rupture	ISO 10545-4	≥ 35 N/mm ²	compliant
	surface quality	ISO 10545-2	Complies with the standards	≥95%
	thermal shock resistance	ISO 10545-9	No sample must show visible defects	compliant
	deep abrasion resistance	ISO 10545-6	≤ 175 mm ³	compliant
	chemical resistance	ISO 10545-13	Declared value	compliant
	resistance to frost	ISO 10545-12	Resistant	compliant
	staining resistance	ISO 10545-14	Minimum Class 3	compliant