

# Rosso



Our new Italian tessellated collection, Rosso has arrived. Available in three shapes in a beautiful terracotta colour... a modern twist on a traditional look.

**PRODUCT TYPE:** Red Quarry tile

**COLOURS:** Terracotta

**SIZES:** 150X150mm, 150x170mm and  
60x230mm  
Non-Rectified edges

**FINISHES/USAGE:** Matt/Wall and floor

**AESTHETIC QUALITIES:** Terracotta brick look tile

**TECHNICAL INFO:** P5 'V' Pendulum Slip Rating


This is a Tessellated product. It is recommended to be sealed with a penetrating sealer (before and after grouting) such as Drytreat Satin Proof

It is not recommended to use dark grouts

See back page for more technical data

**ORIGIN:** Italy

**VARIATION:**




V1

# Rosso


## COMPLETE SERIES

### PRODUCT SPECIFICATIONS

SIZES	FINISHES	SLIP RATINGS	TILE EDGE
HEXAGON	MATT	P5 'V' Pendulum	NON-RECTIFIED
BOX	MATT	P5 'V' Pendulum	NON-RECTIFIED
BRICK	MATT	P5 'V' Pendulum	NON-RECTIFIED

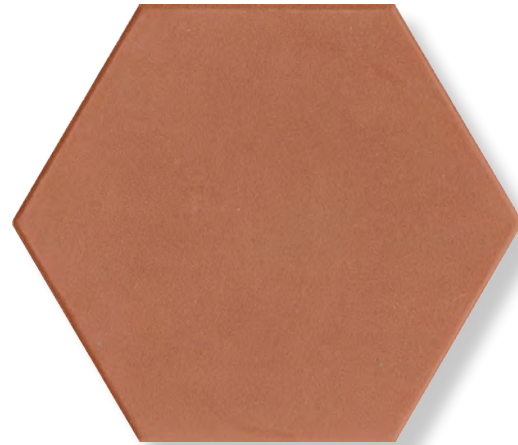

HEXAGON



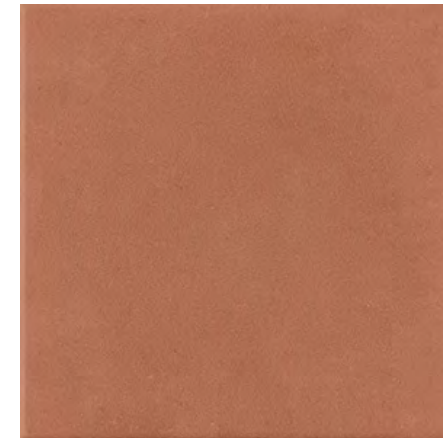








BOX



BRICK

### FORMATS



	<b>technical characteristics</b>	<b>test method</b>	<b>REQUIREMENTS ISO 13006-H/EN 14411</b>	<b>manufacturer norm</b>
	water absorption	iso 10545-3	$0.5\% < E \leq 3\%$	2,8%
	frost resistance	iso 10545-12	no alterations	resistant
	breaking strength	iso 10545-4	$S \geq 700$	S = 1114
	resistance to deep abrasion	iso 10545-6	$\leq 175$	160
	thermal shock resistance	iso 10545-9	resistant	resistant
	chemical resistance	iso 10545-13	as indicated by manufacturer	ULA