

pearl



cream




argent



pearl




cream



argent

# travstone cross

Add a refreshed lightness to the room with our Travstone Cross porcelain range. Simple, inviting and cohesive, these tiles embody an inherent natural quality to suit a wide range of indoor-outdoor applications. Featuring three beautiful colours with gentle organic crosscut veining.













sides dydiable fidine resistant yarranon 72 3	iip ruiiig r 4 s	sup runing 1 3		
dimensions		150x150mm	matt	all colours
		400x600mm	matt	all colours
		600x600mm	matt	all colours
		600x600x20mm	matt	all colours
	3D combed	600x 1200mm	combed	all colours
	paver	600x600x20mm	grip	all colours
	paver coping	400x600x20mm	grip	all colours
		600x600x20mm	grip	all colours
	slab	1200x2700x6mm	matt	pearl
material				glazed porcelain
VARIATION				V2
TILE EDGE				rectified
THICKNESS			tile	10mm
			slab	6mm
			paver	20mm
SLIP RATING		matt	P4	indoor & outdoor
		grip	P5	indoor & outdoor
		paver	P5	indoor & outdoor

### TRAVSTONE CROSS PAVER

400x600x20mm 600x600x20mm



pearl



cream



argent



## TRAVSTONE CROSS 3D COMBED

600x1200mm






left pictured: pearl right pictured: argent

# technical data

PROPERTIES	TEST METHOD	PRESCRIBED VALUES	VALUE
water absorption	ISO 10545-3	≤0.5%	≤0.4%
bending strength	ISO 10545-4	≥ 35 N/ mm2	compliant
thermal shock resistance	ISO 10545-9	No sample must show visible defects	compliant
deep abrasion resistance	ISO 10545-6	≤ 175 mm3	compliant
resistance to chemicals	ISO 10545-13	Declared value	compliant
resistance to frost	ISO 10545-12	Resistant	compliant
resistance to staining	ISO 10545-14	Minimum class 3	compliant
surface quality	ISO 10545-2	Complies with the standards	≥ 95%

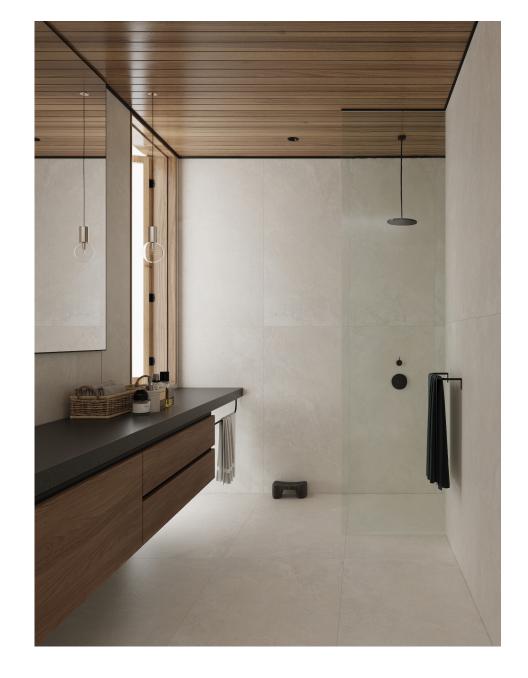

Please note that all products must be fabricated using score & snap method and/or wet cutting in conjunction with AS/NZS 1715:2009, AS/NZS 60335.2.69:2017. For more information please refer to: <a href="https://www.safework.nsw.gov.au">https://www.safework.nsw.gov.au</a>