

skheme®


yugen split

yugen split

Understated, fresh and elegant, Yugen Split contributes an organic clean design and adds diversity. The slim undulated profile lends a contemporary aesthetic for a variety of architectural projects. Offered in three neutral shades, this tile series creates a natural element to build upon for indoor and outdoor spaces.




white

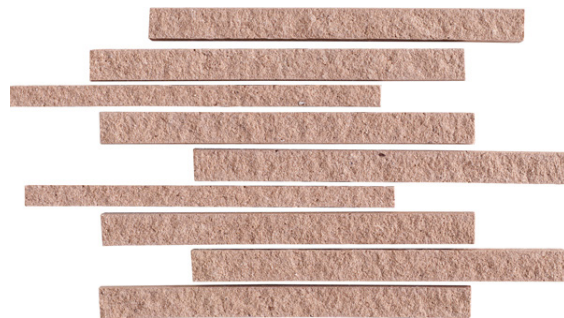

clay



grey

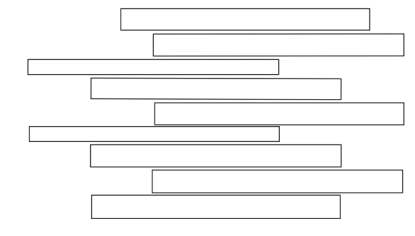

180x330mm



3D format



fire resistant



indoor / outdoor



wall only



V2

DIMENSIONS	180x330mm	matt	all colours
MATERIAL	unglazed porcelain		
VARIATION	V2		
TILE EDGE	rectified		
THICKNESS	Random thickness of 13 17 21mm		

technical data

PROPERTIES	TEST METHOD	PRESCRIBED VALUES	VALUE
water absorption	ISO 10545-3	$0.5\% < E_b \leq 3\%$	1.4%
modulus of rupture	ISO 10545-4	minimum 30	44.1
breaking strength	ISO 10545-4	≥ 1100	6937
surface quality	ISO 10545-2	95% free of visible defects	100%
resistance to chemicals	ISO 10545-13	minimum class B	A
resistance to staining	ISO 10545-14	declared value	class 5



Please note that all products must be fabricated using score & snap method and/or wet cutting in conjunction with AS/NZS 1716:2012, AS/NZS 1715:2009, AS/NZS 60335.2.69:2017. For more information please refer to: <https://www.safework.nsw.gov.au>

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

A 2/12-14 Neild Avenue Rushcutters Bay NSW 2010 | P 02 8755 2300 | W www.skheme.com | E info@skheme.com |